

PPC-310 EHL
PPC-312 EHL
PPC-315 EHL
PPC-321W EHL

10.4"/12"/15"/21.5" Fanless Panel PC with Intel® Celeron® J6412 Processor



Introduction

PPC-300(W) EHL is an industrial panel PC with 10.4"/12"/15"/XGA/21.5" FHD TFT LCD, powered by Intel Celeron quad core J6412 processor. With aesthetic aluminum alloy enclosure, PPC-300(W) EHL ensures fanless reliability and easy maintenance in diverse industrial applications. Moreover, it provides more faster and flexible connection via 2 x 2.5G Ethernet port, 2 x USB 3.1 and 1 x Type C (USB only). The PPC-300(W) EHL is ideal for MES, processing and general industrial equipment integration.


Specifications

System	CPU	PPC-310-RJ60A		PPC-310-PJ60A		PPC-312-RJ60A		PPC-312-PJ60A		PPC-315-RJ60A		PPC-315-PJ60A		PPC-321W-PJ60A	
	Frequency	Intel® Celeron® J6412 quad core													
	L2 Cache	2.0 GHz													
	Memory	1.5 MB													
	Storage	1 x SDRAM DDR4 3200 MHz (max. 32G)													
	Network (LAN)	1 x 2.5" SATA bay (optional; requires a bracket module for installation) 1 x M.2 slot: M key for storage (SATA only, 2242 & 2280)													
	I/O	2 x 10/100/1000/2500 Mbps Ethernet (Intel I226-LM)													
	Expansion	2 x Serial ports: 1 x RS-232, 1x RS-232/422/485 (Adjustable through BIOS) ,2 x USB 2.0, 2 x USB 3.1													
	Watchdog Timer	1 x TypeC (USB only) 1 x HDMI1.4 1 x TPM 2.0													
Physical Characteristics	Dimensions	271.8 x 216.8 x 49.7 mm (10.7 x 8.5x 2 in)				317 x 246 x 52.7 mm (12.5 x 9.7 x 2.07 in)				392 x 314 x 55 mm (15.4 x 12.4 x 2.2 in)				558 x 350 x 61 mm (22 x 13.8 x 2.4 in)	
	Weight	3.1 kg (6.83 lb)				3.6 kg (7.9 lb)				5 kg (11.02 lb)				7.2 kg (15.87 lb)	
OS Support	OS Support	Microsoft® Windows 10 IOT LTSC(64-bit), Win11, Linux, Android													
Power Consumption	Input Voltage	12 ~ 30 V _{DC}													
	Power Consumption	35W (Burn-in test 8.1 in Windows 10, 64-bit)				40W (Burn-in test 8.1 in Windows 10, 64-bit)				45W (Burn-in test 8.1 in Windows 10, 64-bit)				50W (Burn-in test 8.1 in Windows 10, 64-bit)	
LCD	Display Type	10.4" TFT LCD (LED backlight)				12" TFT LCD (LED backlight)				15" TFT LCD (LED backlight)				21.5" TFT LCD (LED backlight)	
	Resolution	1024 x 768				1024 x 768				1024 x 768				1920 x 1080	
	Viewing Angle	80 (left), 80 (right), 88 (up), 88 (down)				85 (left), 85 (right), 89 (up), 89 (down)				80 (left), 80 (right), 88 (up), 88 (down)				89 (left), 89 (right), 89 (up), 89 (down)	
	Luminance (cd/m²)	350				500				300				250	
	Contrast Ratio	1000				1000				1300				1000	
	Backlight Lifetime	50,000 hr (min.)				30,000 hr (min.)				50,000 hr (min.)				50,000 hr (min.)	
Touchscreen	Touch Type	5-wire resistive touch		Projected Capacitive Multi-touch		5-wire resistive touch		Projected Capacitive Multi-touch		5-wire resistive touch		Projected Capacitive Multi-touch		ELO Projected Capacitive Multi-touch	
	Light Transmission	80±5% at 550 nm wavelength		88%		80±5% at 550 nm wavelength		88%		81±3% at 550 nm wavelength		88%		88%	
	Controller	USB interface													
	Durability (Touches)	Greater than 35 million touches in one location without failure		Cover glass > 7H		Greater than 35 million touches in one location without failure		Cover glass > 7H		Greater than 35 million touches in one location without failure		Cover glass > 7H		Cover glass > 7H	
Environment	Operating Temperature	-10 ~ 50°C (14 ~ 122°F)													
	Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)													
	Relative Humidity	95% @ 40 °C (non-condensing)													
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27													
	Vibration	Operating Random Vibration Test, 5 ~ 500Hz, 2Grms with SSD, follow IEC 60068-2-64													
	EMC	CE, FCC Class B, BSMI, UKCA, VCCI													
	Safety	CB, CCC, UL, UKCA													
	Front Panel Protection	IP66 compliant													

Dimensions


Unit: mm

PPC-310 EHL

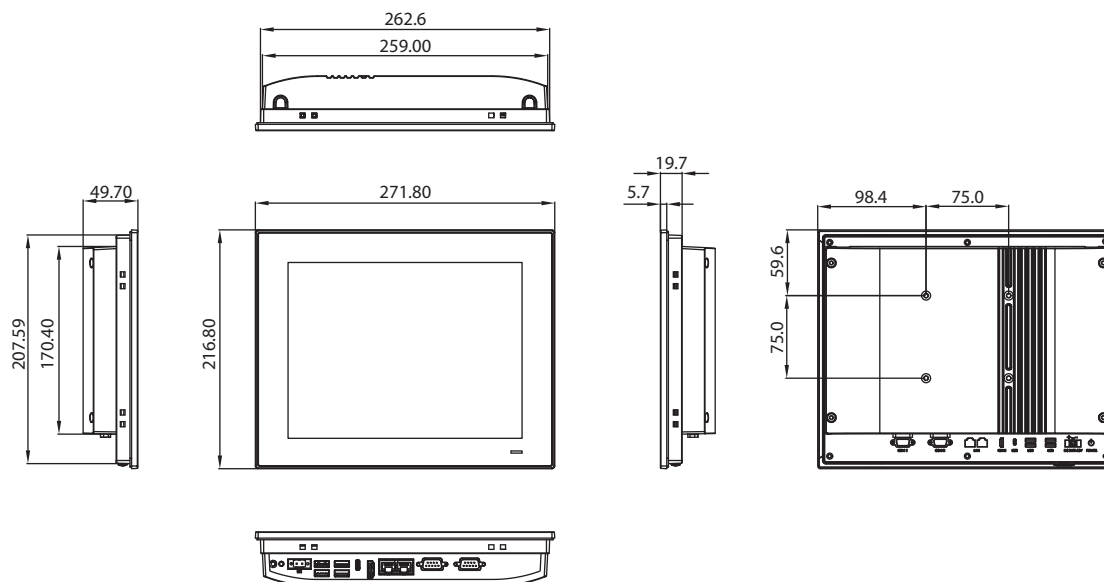

Panel Cutout Dimensions: 265 x 210 mm (10.43 x 8.26 in)

PPC-312 EHL

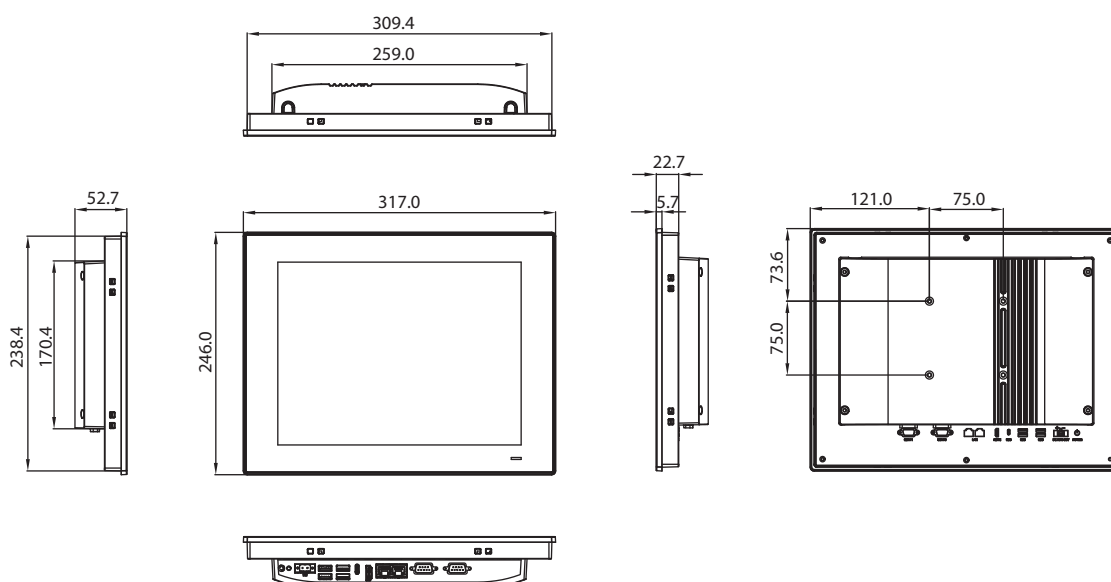


Panel Cutout Dimensions: 311 x 240 mm (12.24 x 9.44 in)

Dimensions


Unit: mm

PPC-315 EHL

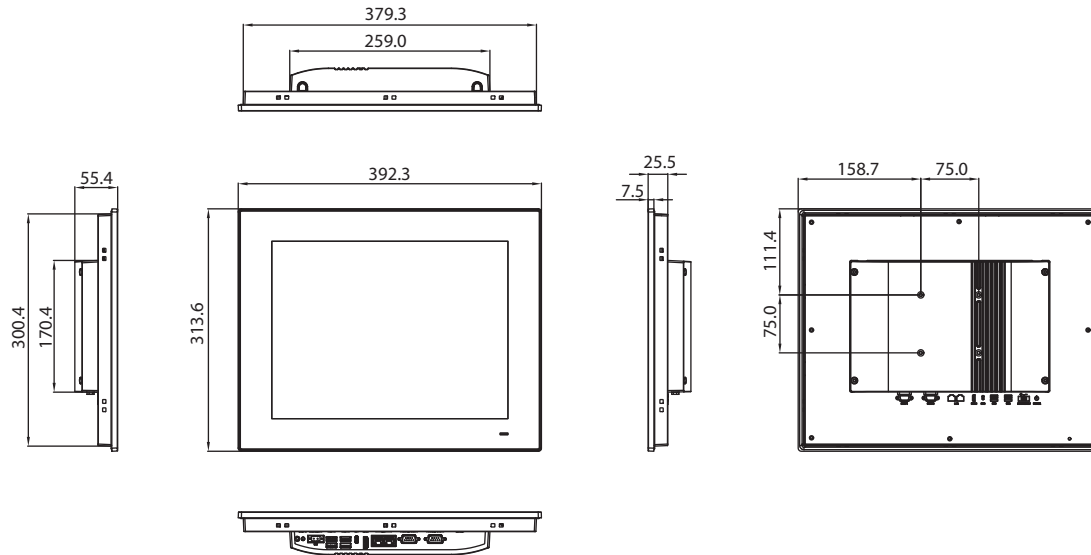

Panel Cutout Dimensions: 382 x 303 mm (15.03 x 11.92 in)

PPC-321W EHL

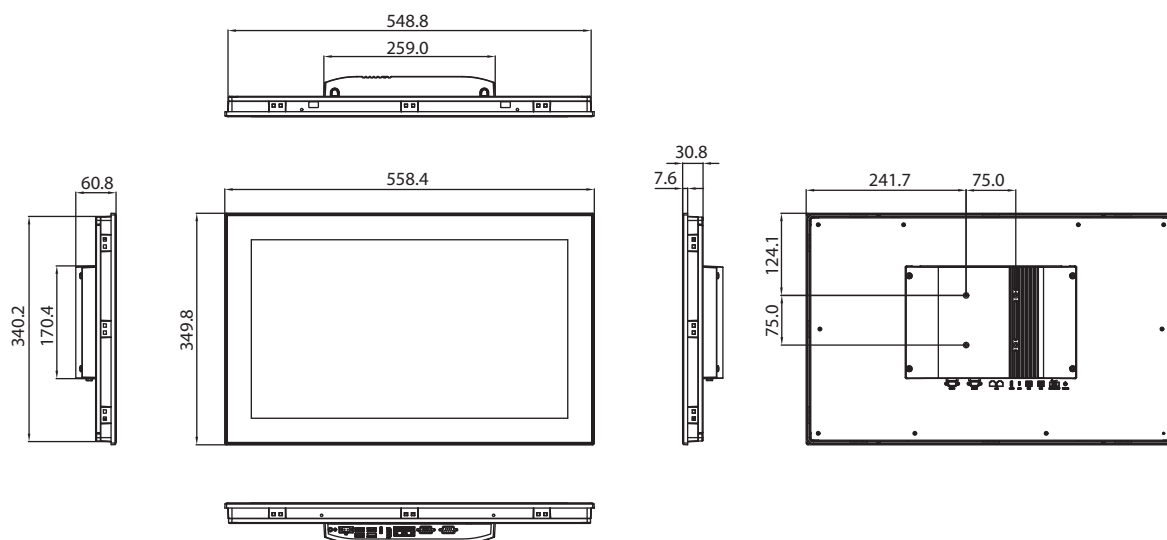


Panel Cutout Dimensions: 550.3 x 341.8 mm (21.66 x 13.45 in)

Ordering Information

Part Number	Description
PPC-310-RJ60A	10.4" PPC w/Intel J6412, Resistive
PPC-310-PJ60A	10.4" PPC w/Intel J6412, P-Cap
PPC-312-RJ60A	12" PPC w/Intel J6412, Resistive
PPC-312-PJ60A	12" PPC w/Intel J6412, P-Cap
PPC-315-RJ60A	15" PPC w/Intel J6412, Resistive
PPC-315-PJ60A	15" PPC w/Intel J6412, P-Cap
PPC-321W-PJ60A	21.5" PPC w/Intel J6412, P-Cap
98R3P300020	PPC-300 EHL 2.5" SSD bracket module
96PSA-A90W190T-3	Power adapter 100-240V 90W 19V
PPC-WLAN-D2	M.2, WiFi6 +BT5.2, 2T2R, w/Antenna
PPC-ARM-A03	ARM VESA Standard (A-CLEVER) for PPC series
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-Stand-A1E	Stand for PPC series
1700001524	Power cord 3P UL 10A 125V 1.8M
170203183C	Power cord 3P Europe (WS-010+083) 183cm
1700008921	Power cord 3P/3P 1.8M PSE
96CB-POWER-B-1.8MB	Power code 3P CCC(China) 1.8M
98R3P300010	PPC-300 RFID Read only 13.56MHz&125k


I/O View

PPC-310 EHL

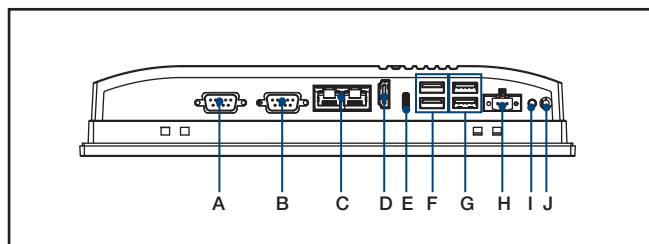


- A. 1 x RS-232
- B. 1 x RS-232/422/485
- C. 2 x LAN
- D. 1 x HDMI
- E. 1 x Type C (USB only)
- F. 2 x USB 3.1
- G. 2 x USB 2.0
- H. DC-In
- I. Power Switch
- J. Pre cut hole for power button cable extend

PPC-312 EHL

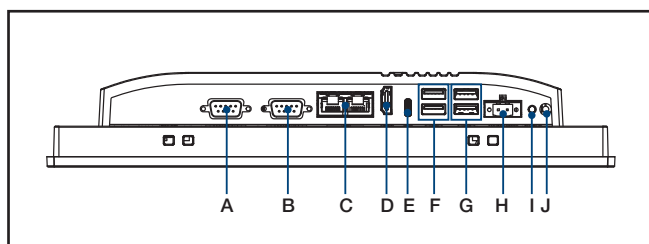


- A. 1 x RS-232
- B. 1 x RS-232/422/485
- C. 2 x LAN
- D. 1 x HDMI
- E. 1 x Type C (USB only)
- F. 2 x USB 3.1
- G. 2 x USB 2.0
- H. DC-In
- I. Power Switch
- J. Pre cut hole for power button cable extend

PPC-315 EHL

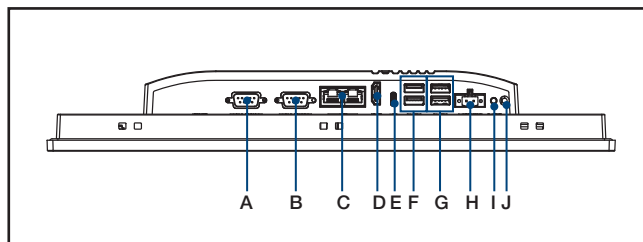

- A. 1 x RS-232
- B. 1 x RS-232/422/485
- C. 2 x LAN
- D. 1 x HDMI
- E. 1 x Type C (USB only)
- F. 2 x USB 3.1
- G. 2 x USB 2.0
- H. DC-In
- I. Power Switch
- J. Pre cut hole for power button cable extend

PPC-321W EHL

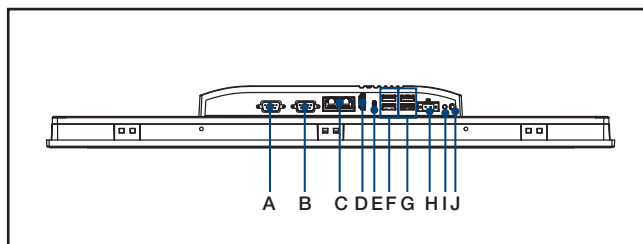

- A. 1 x RS-232
- B. 1 x RS-232/422/485
- C. 2 x LAN
- D. 1 x HDMI
- E. 1 x Type C (USB only)
- F. 2 x USB 3.1
- G. 2 x USB 2.0
- H. DC-In
- I. Power Switch
- J. Pre cut hole for power button cable extend