

R15IE3S-SPC369

15" Intel Atom® x6413E IP69K Stainless PCAP Chassis Panel PC



KEY FEATURES

- 15", 1024 x 768, P-cap touch with flat design
- Intel Atom® x6413E Elkhart Lake processor
- SUS 316 / AISI 316 stainless steel for food and chemical industries
- Full IP69K waterproof enclosure
- A true flat, easy-to-clean front surface with edge-to-edge design
- Plenty of I/Os, including USB 2.0, RS232 and RJ45-10/100/1000 LAN
- Waterproof ports with adapter cables for external connectivity
- Support VESA/ YOKE mount
- Support Glove/ Rain mode
- Optical bonding (optional)

INTRODUCTION

Winmate IP69K Stainless PCAP Chassis Panel PC Series offers robust solutions for demanding environments, featuring Intel® processors and sizes ranging from 10.4" to 24". Designed with SUS 316/AISI 316 stainless steel, these PCs are ideal for food, beverage, and chemical industries. The full IP69K waterproof enclosure, true-flat PCAP touch screen, and edge-to-edge design ensure durability, hygiene, and easy cleaning. Equipped with versatile I/Os, waterproof ports, and support for VESA/YOKE mounts, these panel PCs provide superior performance in wet, dusty, and extreme conditions, including Glove and Rain modes.

SPECIFICATIONS

Display

Resolution	1024x768	Size	15.0 inches
Contrast Ratio	2000:1	Panel Brightness	300.0 nits
View Angles	88,88,88,88	Active Area	304.1x228.1 mm
Touch / Glass	Projected Capacitive Multi Touch Screen		

System Specification

WLAN	Support (Optional)	BT	Support (Optional)
Processor	Intel Atom® x6413E (up to 3.0GHz)	Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional)
Storage	1 x M.2 2242 B-key SSD 128GB 256GB (Optional) 512GB (Optional)	Ethernet controller	1 x Intel® Ethernet Controller
Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)		

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 45°C
Storage Temperature	-20°C to 60°C	IP rating	IP69K

Certification

Certification	CE, FCC
---------------	---------

IO Ports

USB Port	1x M12 Waterproof Connector for 2 x USB2.0	Serial Port	1 x M12 waterproof connector for RS232
LAN	1 x Waterproof Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage

Control

Button	1 x Power Button 1 x Reset Button
--------	--------------------------------------


Accessory

Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps Manual VESA screws
-----------	---

Power

Power Rating	12V DC (M12 type)
--------------	-------------------

DIMENSIONS UNIT:MM

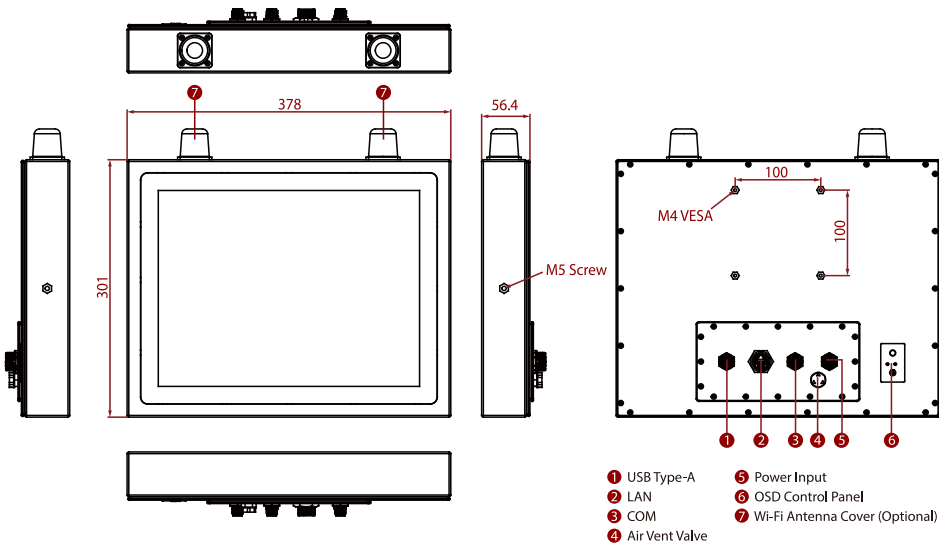

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.